


# HyPro STP375S - 72/Pfd STP370S - 72/Pfd STP365S - 72/Pfd



## 375Watt

### MONOCRYSTALLINE BIFACIAL SOLAR MODULE

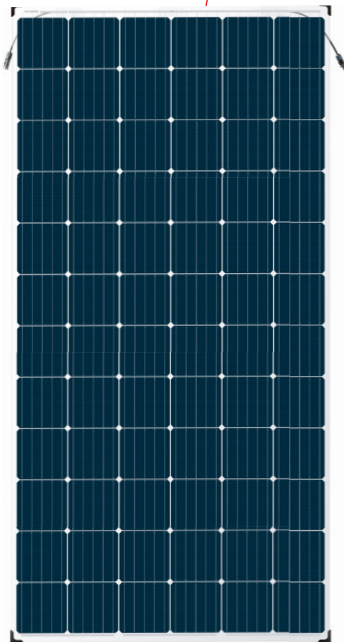

#### Features



#### Higher power output

The power generation can increase up to 25%



#### PID Free

Potential induced degradation (PID) free guaranteed



#### Distributed junction box

Special distributed junction box design avoids shading on the back side



#### Positive tolerance

Positive tolerance of up to 5W delivers higher output reliability



#### Excellent weak light performance

More power output in weak light condition, such as haze, cloudy, and morning



#### High system voltage Compatible

Maximum 1500 V DC system voltage reduces total system cost

Certifications and standards:  
IEC 61215, IEC 61730, conformity to CE



#### Trust Suntech to Deliver Reliable Performance Over Time

- World-class manufacturer of crystalline silicon photovoltaic modules
- Unrivaled manufacturing capacity and world-class technology
- Rigorous quality control meeting the highest international standards: ISO 9001: 2008, ISO 14001: 2004 and ISO17025: 2005
- Regular independently checked production process from international accredited institute/company
- Tested for harsh environments (salt mist, ammonia corrosion and sand blowing testing: IEC 61701, IEC 62716, DIN EN 60068-2-68)\*\*
- Long-term reliability tests
- 2 x 100% EL inspection ensuring defect-free

#### Industry-leading Warranty based on nominal power



- 97.5% in the first year, thereafter, for years two (2) through thirty (30), 0.5% maximum decrease from MODULE's nominal power output per year, ending with the 83% in the 30th year after the defined WARRANTY STARTING DATE.\*\*\*
- 12-year product warranty
- 30-year linear performance warranty

#### High efficiency Bifacial PERC cell



By using bifacial PERC cell and double glass technology, the frontside power can reach to 375W, and the backside power generation can increase up to 25%.

#### IP68 Rated Junction Box




The Suntech IP68 rated junction box ensures an outstanding waterproof level, supports installations in all orientations and reduces stress on the cables. High reliable performance, low resistance connectors ensure maximum output for the highest energy production.

\*WEEE only for EU market.

\*\* Please refer to Suntech Product Near-coast Installation Manual for details. \*\*\* Please refer to Suntech Product Warranty for details.

# HyPro STP375S - 72/Pfd STP370S - 72/Pfd STP365S - 72/Pfd

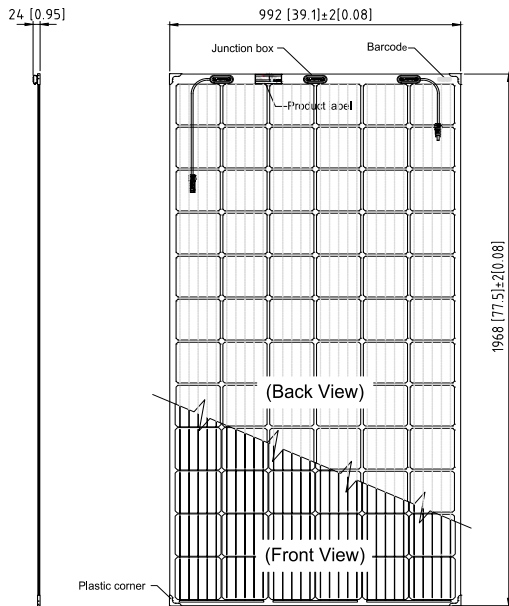

## Electrical Characteristics


STC	STP375S-72/ Pfd	STP370S-72/ Pfd	STP365S-72/ Pfd
Maximum Power at STC (Pmax)	375 W	370 W	365 W
Optimum Operating Voltage (Vmp)	38.9 V	38.8 V	38.6 V
Optimum Operating Current (Imp)	9.65 A	9.54 A	9.46 A
Open Circuit Voltage (Voc)	47.7 V	47.6 V	47.4 V
Short Circuit Current (Isc)	10.17 A	10.06 A	9.97 A
Module Efficiency	19.2%	19.0%	18.7%
Operating Module Temperature	-40 °C to +85 °C		
Maximum System Voltage	1500 V DC (IEC)		
Maximum Series Fuse Rating	20 A		
Power Tolerance	0/+5 W		

STC: Irradiance 1000 W/m<sup>2</sup>, module temperature 25 °C, AM=1.5;  
Best in Class AAA solar simulator (IEC 60904-9) used, power measurement uncertainty is within +/- 3%

NOCT	STP375S-72/ Pfd	STP370S-72/ Pfd	STP365S-72/ Pfd
Maximum Power at NOCT (Pmax)	277.4 W	273.5 W	269.1 W
Optimum Operating Voltage (Vmp)	35.8 V	35.7 V	35.6 V
Optimum Operating Current (Imp)	7.75 A	7.67 A	7.57 A
Open Circuit Voltage (Voc)	44.0 V	43.9 V	43.6 V
Short Circuit Current (Isc)	8.23 A	8.14 A	8.07 A

NOCT: Irradiance 800 W/m<sup>2</sup>, ambient temperature 20 °C, AM=1.5, wind speed 1 m/s;  
Best in Class AAA solar simulator (IEC 60904-9) used, power measurement uncertainty is within +/- 3%

Current-Voltage & Power-Voltage Curve (375S)

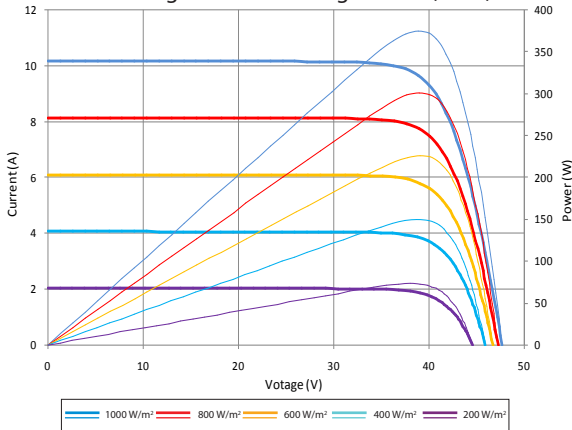


## Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.40 %/°C
Temperature Coefficient of Voc	-0.34 %/°C
Temperature Coefficient of Isc	0.060 %/°C

## Mechanical Characteristics

Solar Cell	Monocrystalline silicon 6 inches
No. of Cells	72 (6 × 12)
Dimensions	1968 × 992 × 6mm (77.5 × 39.1 × 0.2 inches)
Weight	28.5 kgs (62.8 lbs.)
Front/Back Glass	2.5 mm (0.098 inches) heat strengthened glass
Junction Box	IP68 rated
Output Cables	4.0 mm <sup>2</sup> (0.006 inches <sup>2</sup> ), unsymmetrical lengths (-) 350mm (13.8 inches), (+) 160 mm (6.3 inches)
Connectors	MC4 compatible

## Dealer information



## Packing Configuration

Container	20' GP	40' HC
Pieces per pallet	33	33
Pallets per container	5	22
Pieces per container	165	726

All values indicated in this data sheet are subject to change without prior announcement. The specifications may vary slightly. All specifications are in accordance with standard EN 50380. Color differences of the modules relative to the figures as well as discolorations of/in the modules which do not impair their proper functioning are possible and do not constitute a deviation from the specification.